




CAT. No.
57100

IEC 60320 C-19 RECEPTACLE, SCREW MOUNT TO PANELS, 6.3 x 0.8 mm (.250" x .032") QC
TERMINALS, BLACK, 2 POLE 3 WIRE, 16 AMP 250 VOLT (INTERNATIONAL), 21 AMP 125/250V (UL/CSA).

16A 250V	APPROVALS	SEV <input checked="" type="checkbox"/>	VDE <input checked="" type="checkbox"/>
21A 125/250V	APPROVALS	CSA <input checked="" type="checkbox"/>	UL <input checked="" type="checkbox"/>
	CERTIFICATIONS	CE <input checked="" type="checkbox"/>	ROHS <input checked="" type="checkbox"/>
	STANDARDS	IEC 60320 C-19	

CONFIGURATIONS

RECEPTACLE	PLUG	21 AMPERE 125/250 VOLT UL/CSA. 16 AMPERE 250 VOLT INTERNATIONAL.
		
IEC 60320 C-19	IEC 60320 C-20	

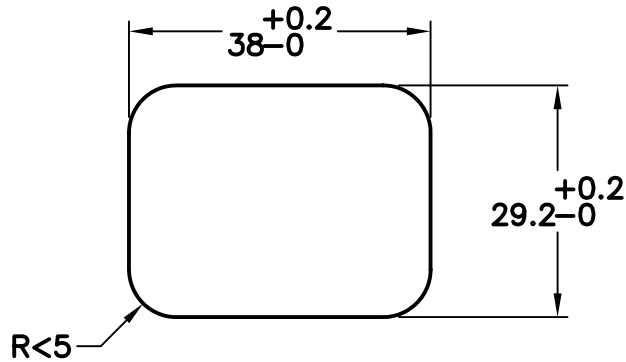

PANEL CUTOUT

ALL DIMENSIONS ARE IN MILLIMETERS

