

CAT. No.

84161

AUSTRALIA / NEW ZEALAND 10 AMPERE 250 VOLT POWER CORD, AS/NZS 4417 (RCM) / AS/NZS 3112 PLUG, TYPE I (AU1-10P), AS/NZS 60320 C-13 CONNECTOR, G TSA-3 1.0mm² CORD, 2 POLE-3 WIRE GROUNDING (2P+E), 2.5 METERS (8FT.-2IN.) (98") LONG. BLACK.

APPROVALS

NSW Q052039 ES0150725 (RCM MARK) NSW 23757 N16493 (RCM MARK)

CERTIFICATIONS


SAA (RCM MARK) REACH ROHS2 (2011/65EU)

STANDARDS

SAA AS/NZS 4417 (RCM MARK) AS/NZS 3112 NSW 23757 N16493 (RCM MARK) AS/NZS 3191 AS/NZS 60320.1 G TSA-3

SPECIFICATIONS:

1. OVERALL LENGTH: 2.5 METERS (8FT.-2IN.)
2. CONDUCTORS: 1.0 mm x 3 WITH IEC COLOR CODE (GREEN/YELLOW, BLUE, BROWN)
3. CABLE: G TSA-3, 250/440 VOLT, AS/NZS 3191, BLACK
4. PLUG: AS/NZS 4417, AS/NZS 3112, (INSULATED LINE/NEUTRAL BLADES), STRAIGHT, BLACK
5. CONNECTOR: AS/NZS 60320.1 C-13, STRAIGHT, BLACK
6. RATED: 10 AMPERE 250 VOLT
7. TEMPERATURE RATING: 75°C

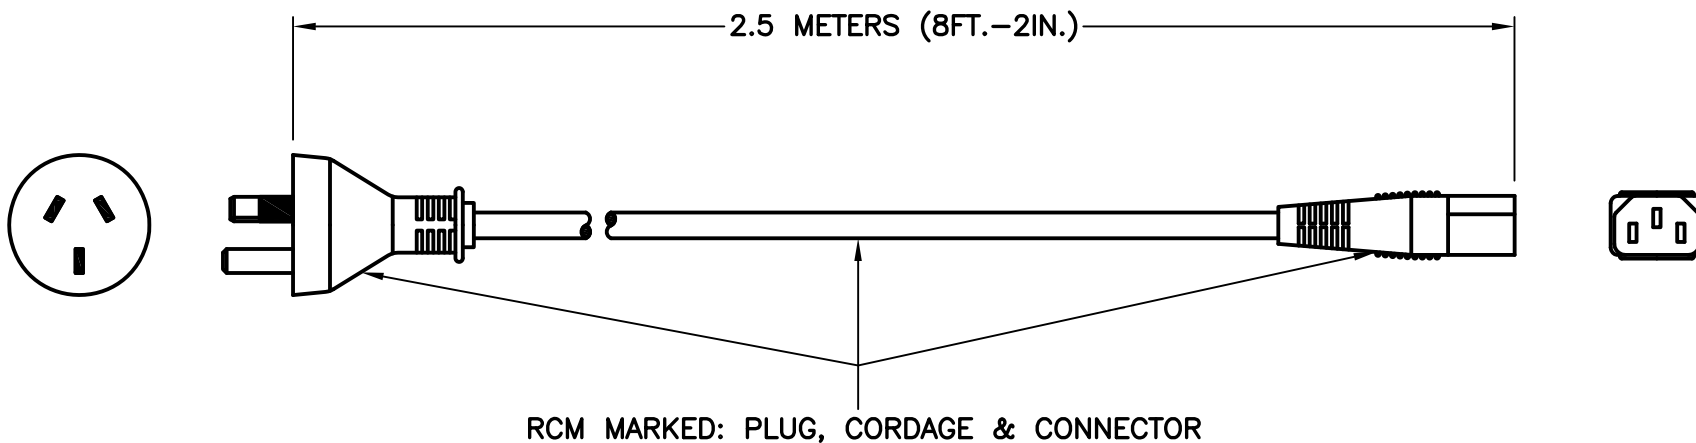

AU1-10P
SAA, AS/NZS 4417, RCM MARK,
AS/NZS 3112

RCM (Regulatory Compliance Mark)
Electrical Safety, EMC, EME &
Telecommunications Requirements

AS/NZS 60320.1 C-13

International Configurations, Inc. P.O. Box 3374 Enfield, Connecticut 06083 TEL (860)749-6380 FAX (860)749-2985

www.InternationalConfig.com

sales@internationalconfig.com

Copyright 2018 International Configurations, Inc. All Rights Reserved ©