

CAT. No.

98230X5M

UNIVERSAL DETACHABLE CORD SET, IEC 60320 C-14 PLUG AND IEC 60320 C-13 CONNECTOR, 10 AMPERE 250 VOLT, SJTO, 105°C CORDAGE, 2 POLE 3 WIRE GROUNDING, 5 METERS (16FT.-5IN.) LONG, BLACK.


APPROVALS	UL <input checked="" type="checkbox"/>	CSA <input checked="" type="checkbox"/>	VDE <input checked="" type="checkbox"/>	DEMKO <input checked="" type="checkbox"/>	FI <input checked="" type="checkbox"/>	IMQ <input checked="" type="checkbox"/>	NEMKO <input checked="" type="checkbox"/>	SEMKO <input checked="" type="checkbox"/>	SEV <input checked="" type="checkbox"/>
CERTIFICATIONS	REACH <input checked="" type="checkbox"/>	ROHS <input checked="" type="checkbox"/>	CE <input checked="" type="checkbox"/>						
STANDARDS	IEC 60320 <input checked="" type="checkbox"/>								

RELATED POWER CORDS

<u>CATALOG No</u>	<u>LENGTH</u>
98226	2.5 METERS
98220	2 METERS
98230	3 METERS
98230X5M	5 METERS
98216	1 METER
98216X12IN	12 INCHES
98216X18IN	18 INCHES
98216X24IN	24 INCHES
98216X30IN	30 INCHES
98216X36IN	36 INCHES
98216X48IN	48 INCHES
98216X60IN	60 INCHES
98216X72IN	72 INCHES
98216X96IN	96 INCHES
98216X10FT	10 FEET
98216X12FT	12 FEET
98216X15FT	15 FEET
98216X20FT	20 FEET
98226-Y	2.5 METERS
98226-Y18	18 INCHES
98226-Y72	72 INCHES

SPECIFICATIONS:

1. OVERALL LENGTH: 5 METERS (16FT.-5IN.)
2. CONDUCTORS: 1.0 MM² x 3 (18 AWG X 3)
3. JACKET: H05VV (SJTO), 105°C, BLACK
4. PLUG: IEC 60320 C-14, STRAIGHT, BLACK
5. CONNECTOR: IEC 60320 C-13, STRAIGHT, BLACK
6. RATED: 10 AMPERE 250 VOLT
7. CABLE DIAMETER (APPROX.): 8.0 mm
8. GENERAL MATERIAL: PVC

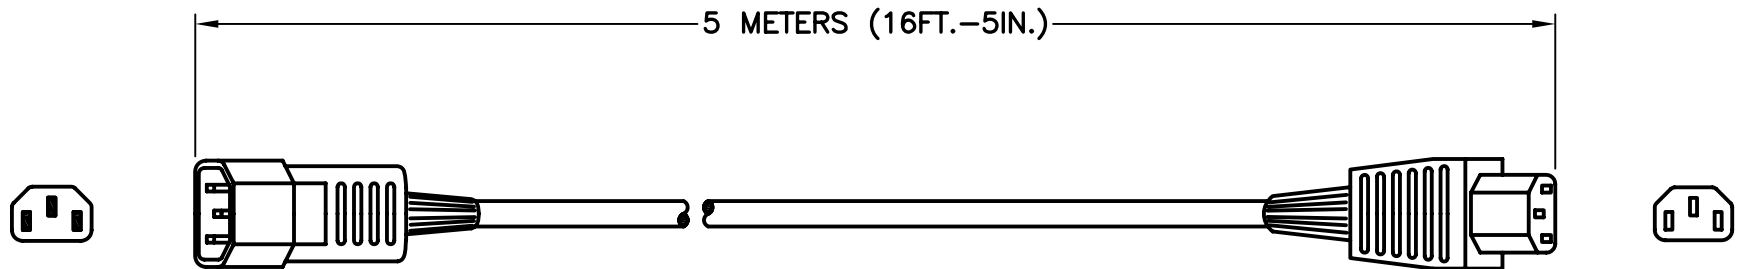

IEC 60320, C-14

IEC 60320, C-13