

CAT. No.
111-10150

**FLAT PIN HEATER APPLIANCE CONNECTOR, STRAIGHT TYPE, 155°C, BLACK, 16 AMPERE 250 VOLT,
2 POLE 3 WIRE**

APPROVALS / CERT'S.


CE

ALL DIMENSIONS ARE IN MILLIMETERS

MAXIMUM JACKET O.D. ACCEPTED BY EXTERNAL STRAIN RELIEF = 11 DIA (0.433")
 MAXIMUM JACKET O.D. ACCEPTED BY INTERNAL STRAIN RELIEF = 10 DIA (0.394")
 MAXIMUM CONDUCTOR SIZE ACCEPTED BY TERMINALS = 2.5 (14 AWG)

CORDAGE PREPARATION

<u>CONDUCTOR INSULATION COLOR</u>	<u>CONDUCTOR COLOR CODE</u>	<u>"LENGTH"</u>	<u>"STRIP"</u>
GREEN / YELLOW	GROUND	10	6
BLUE	NUETRAL	25	6
BROWN	LINE	25	6

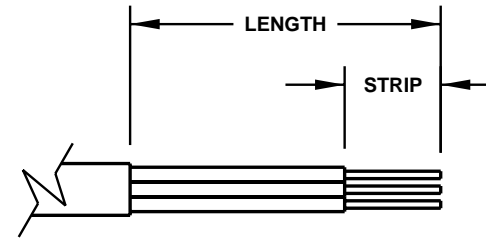

CORDAGE PREPARATION

