

CAT. No.

111-10340-S


ROUND PIN HEATER APPLIANCE CONNECTOR, STRAIGHT TYPE, RED SILICONE RUBBER BODY AND COVER, 200°C CONTINUOUS USAGE AND 300°C SHORT TERM USAGE, 16 AMPERE 250 VOLT, 2 POLE 3 WIRE STANDARD: DIN 49 491

ALL DIMENSIONS ARE IN MILLIMETERS

MAXIMUM JACKET O.D. ACCEPTED BY EXTERNAL STRAIN RELIEF = 10 DIA (0.394")
 MAXIMUM JACKET O.D. ACCEPTED BY INTERNAL STRAIN RELIEF = 10 DIA (0.394")
 MAXIMUM CONDUCTOR SIZE ACCEPTED BY TERMINALS = 4 (12 AWG)

CORDAGE PREPARATION

<u>CONDUCTOR INSULATION COLOR</u>	<u>CONDUCTOR COLOR CODE</u>	<u>"LENGTH"</u>	<u>"STRIP"</u>
GREEN / YELLOW	GROUND	15	6
BLUE	NEUTRAL	35	6
BROWN	LINE	35	6

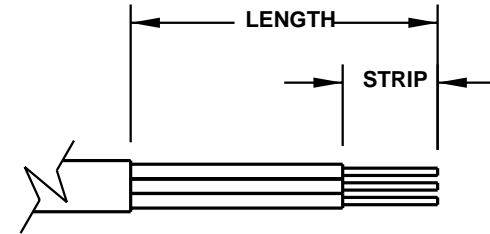

CORDAGE PREPARATION

