

CAT. No.
111-10340


ROUND PIN HEATER APPLIANCE CONNECTOR, STRAIGHT TYPE, SILICONE RUBBER, RED BODY, BLACK COVER,
200°C CONTINUOUS USAGE AND 300°C SHORT TERM USAGE, 16 AMPERE 250 VOLT, 2 POLE 3 WIRE
STANDARD: DIN 49 491

ALL DIMENSIONS ARE IN MILLIMETERS

MAXIMUM JACKET O.D. ACCEPTED BY EXTERNAL STRAIN RELIEF = 10 DIA (0.394")
MAXIMUM JACKET O.D. ACCEPTED BY INTERNAL STRAIN RELIEF = 10 DIA (0.394")
MAXIMUM CONDUCTORSIZE ACCEPTED BY TERMINALS = 4 (12 AWG)

CORDAGE PREPARATION

CONDUCTOR INSULATION COLOR	CONDUCTOR COLOR CODE	"LENGTH"	"STRIP"
GREEN / YELLOW	GROUND	15	6
BLUE	NEUTRAL	35	6
BROWN	LINE	35	6

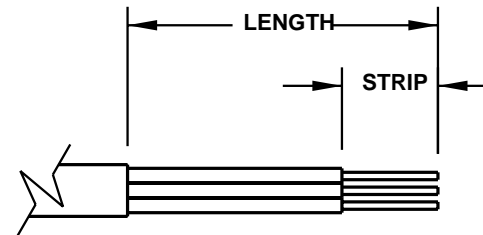

CORDAGE PREPARATION

