

CAT. No.
111-10445

FLAT PIN HEATER APPLIANCE CONNECTOR BODY, RUBBER-SILICONE, STRAIGHT TYPE, RATED 200°C
CONTINUOUS USAGE AND 300°C SHORT TERM USAGE, 16 AMPERE 250 VOLT, 2 POLE 3 WIRE
STANDARD: DIN 49458 A/B

APPROVALS / CERT'S.


VDE

ALL DIMENSIONS ARE IN MILLIMETERS

MAXIMUM JACKET O.D. ACCEPTED BY EXTERNAL STRAIN RELIEF = 10 DIA (0.394")
MAXIMUM JACKET O.D. ACCEPTED BY INTERNAL STRAIN RELIEF = 9 DIA (0.354")
MAXIMUM CONDUCTOR SIZE ACCEPTED BY TERMINALS = 2.5 (14 AWG)

CORDAGE PREPARATION

CONDUCTOR INSULATION COLOR	CONDUCTOR COLOR CODE	"LENGTH"	"STRIP"
GREEN / YELLOW	GROUND	45	8
BLUE	NEUTRAL	35	8
BROWN	LINE	35	8

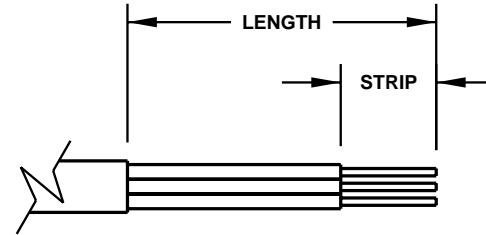

CORDAGE PREPARATION

