

CAT. No.

111-10450

FLAT PIN HEATER APPLIANCE CONNECTOR BODY, STRAIGHT TYPE, PORCELAIN TERMINAL BASE, BLACK
PLASTICCOVER,155°C,16 AMPERE 250VOLT, 2 POLE 3 WIRE
STANDARD: DIN 49458 A/B


APPROVALS / CERT'S.

VDE

MAXIMUM JACKET O.D. ACCEPTED BY EXTERNAL STRAIN RELIEF = 10 DIA (0.394")
MAXIMUM JACKET O.D. ACCEPTED BY INTERNAL STRAIN RELIEF = 9 DIA (0.354")
MAXIMUM CONDUCTOR SIZE ACCEPTED BY TERMINALS = 2.5 (14 AWG)

CORDAGE PREPARATION

CONDUCTOR INSULATION COLOR	CONDUCTOR COLOR CODE	"LENGTH"	"STRIP"
GREEN / YELLOW	GROUND	15	6
BLUE	NEUTRAL	30	6
BROWN	LINE	30	6

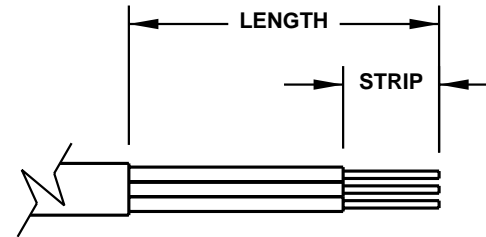

CORDAGE PREPARATION

