

CAT. No.

**111-10455**

FLAT PIN HEATER APPLIANCE CONNECTOR BODY, ANGLE TYPE, RUBBER-SILICONE, RATED 200°C CONTINUOUS  
USAGE AND 300°C SHORT TERM USAGE, 16 AMPERE 250 VOLT, 2 POLE 3 WIRE  
STANDARD: DIN 49458 A/B

APPROVALS / CERT'S.


VDE

**ALL DIMENSIONS ARE IN MILLIMETERS**

MAXIMUM JACKET O.D. ACCEPTED BY EXTERNAL STRAIN RELIEF = 10 DIA (0.394")  
MAXIMUM JACKET O.D. ACCEPTED BY INTERNAL STRAIN RELIEF = 9 DIA (0.354")  
MAXIMUM CONDUCTOR SIZE ACCEPTED BY TERMINALS = 2.5 (14 AWG)

**CORDAGE PREPARATION**

CONDUCTOR INSULATION COLOR	CONDUCTOR COLOR CODE	"LENGTH"	"STRIP"
GREEN / YELLOW	GROUND	50	8
BLUE	NEUTRAL	45	8
BROWN	LINE	45	8

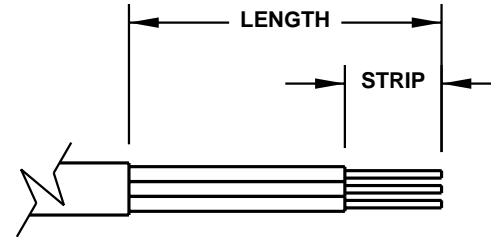

**CORDAGE PREPARATION**

