

CAT. No.

111-10500

FLAT PIN HEATER APPLIANCE PLUG, RUBBER-SILICONE, STRAIGHT TYPE, RATED 200°C CONTINUOUS USAGE AND 300°C SHORT TERM USAGE, 16 AMPERE 250 VOLT, 2 POLE 3 WIRE
STANDARD: DIN 49458 A/B

APPROVALS / CERT'S.


VDE

ALL DIMENSIONS ARE IN MILLIMETERS

MAXIMUM JACKET O.D. ACCEPTED BY EXTERNAL STRAIN RELIEF = 10 DIA (0.394")
MAXIMUM JACKET O.D. ACCEPTED BY INTERNAL STRAIN RELIEF = 8 DIA (0.315")
MAXIMUM CONDUCTOR SIZE ACCEPTED BY TERMINALS = 2.5 (14 AWG)

CORDAGE PREPARATION

CONDUCTOR INSULATION COLOR	CONDUCTOR COLOR CODE	"LENGTH"	"STRIP"
GREEN / YELLOW	GROUND	40	6
BLUE	NEUTRAL	40	6
BROWN	LINE	40	6

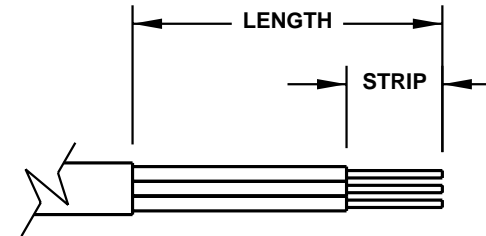

CORDAGE PREPARATION

