















CAT. No.
30290


PLUG ADAPTER, ALLOWS NEMA 1-15P, NEMA 5-15P, NEMA 6-15P, NEMA 5-20P, NEMA 6-20P, UK1-13P, UK3-5P, SW1-10P, IT1-10P, IS1-16P, JA1-15P, EU1-16P, DE1-13P AND EUROPLUG TO INTERFACE WITH EUROPEAN 2 WIRE OUTLETS WITH 4.0 mm OR 4.8 mm DIAMETER OUTLET CONFIGURATIONS, IVORY, 2 POLE 2 WIRE.

 <p>NEMA 1-15R EUROPLUG NON-GROUNDING</p>	 <p>NEMA 5-15R EUROPLUG NON-GROUNDING</p>	 <p>NEMA 6-15R EUROPLUG NON-GROUNDING</p>	 <p>NEMA 5-20R EUROPLUG NON-GROUNDING</p>	 <p>NEMA 6-20R EUROPLUG NON-GROUNDING</p>
 <p>UK1-13R EUROPLUG NON-GROUNDING</p>	 <p>UK3-5R EUROPLUG NON-GROUNDING</p>	 <p>SW1-10R EUROPLUG NON-GROUNDING</p>	 <p>IT1-10R EUROPLUG NON-GROUNDING</p>	 <p>IS1-16R EUROPLUG NON-GROUNDING</p>
 <p>JA1-15R EUROPLUG NON-GROUNDING</p>	 <p>EU1-16R EUROPLUG NON-GROUNDING</p>	 <p>DE1-13R EUROPLUG NON-GROUNDING</p>	 <p>EUROPLUG NON-GROUNDING EUROPLUG NON-GROUNDING</p>	

NOTES:

- ADAPTERS OFTEN HAVE A DIFFERENT RATING ON THE BLADE (PLUG) END AND THE RECEPTACLE END. CAUTION SHOULD BE EXERCISED IN THEIR USE. OVERCURRENT PROTECTION IS DETERMINED BY THE PLUG END.
- THIS ADAPTER ACCEPTS ALL OF THE ABOVE PLUG CONFIGURATIONS.

ALL DIMENSIONS ARE IN MILLIMETERS

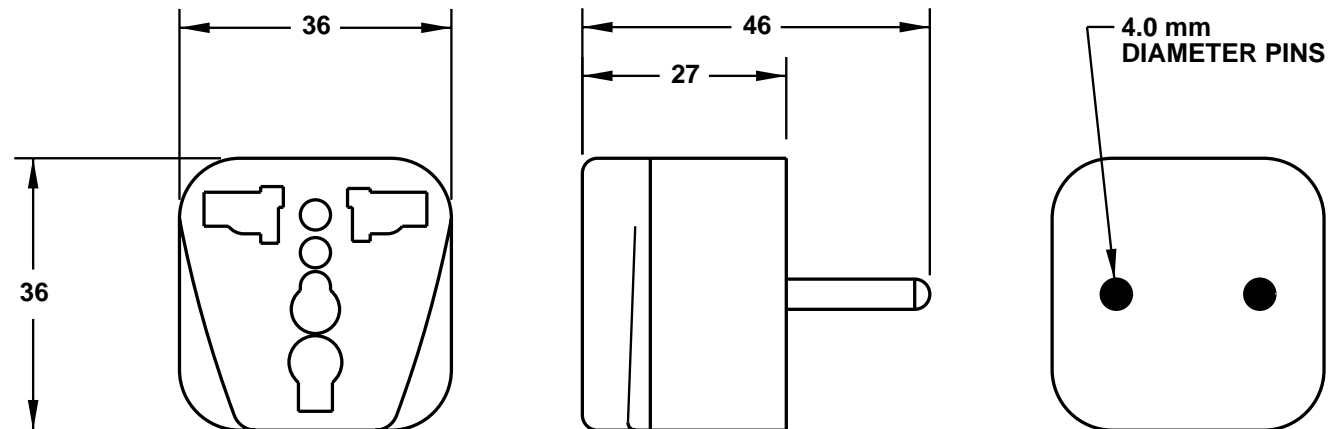

www.InternationalConfig.com
sales@internationalconfig.com