

CAT. No.  
**4720-SSAN**

**NEMAL5-15PANGLE PLUG, GRAY, 2 POLE 3 WIRE GROUNDING, 15 AMPERE 125 VOLT**

APPROVALS / CERT'S.


CSA  UL

**ALL DIMENSIONS ARE IN MILLIMETERS**

MAXIMUM JACKET O.D. ACCEPTED BY INTERNAL STRAIN RELIEF = 10 DIA (0.394")  
MAXIMUM CONDUCTOR SIZE ACCEPTED BY TERMINALS = 2.5 (14 AWG)

**CORDAGE PREPARATION**

<u>CONDUCTOR INSULATION COLOR</u>	<u>CONDUCTOR COLOR CODE</u>	<u>"LENGTH"</u>	<u>"STRIP"</u>
GREEN / YELLOW	GROUND	55	12
BLUE	NEUTRAL	55	12
BROWN	LINE	55	12

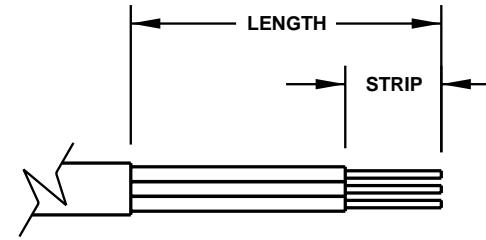

**CORDAGE PREPARATION**

