

CAT. No.  
**5296-BK**

**NEMASTRAIGHT CONNECTOR, COMMERCIAL GRADE, BLACK, IMPACT RESISTANT NYLON, CORD GRIP RANGE  
0.230" - 0.625" (5.84 - 15.88 mm), 2 POLE 3 WIRE GROUNDING, 15 AMPERE 125 VOLT**


APPROVALS / CERT'S. CSA  UL

**ALL DIMENSIONS ARE IN MILLIMETERS**

MAXIMUM JACKET O.D. ACCEPTED BY INTERNAL STRAIN RELIEF = 15 DIA (0.591")  
MAXIMUM CONDUCTOR SIZE ACCEPTED BY TERMINALS = 4.0 (12 AWG)

**CORDAGE PREPARATION**

CONDUCTOR INSULATION COLOR	CONDUCTOR COLOR CODE	"LENGTH"	"STRIP"
GREEN / YELLOW	GROUND	18	8
BLUE	NEUTRAL	18	8
BROWN	LINE	18	8

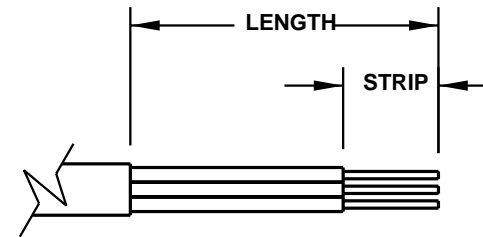

**CORDAGE PREPARATION**

