

CAT. No.  
**5466-XHG**

**NEMA6-20P STRAIGHT BLADE PLUG, BLACK, HOSPITAL GRADE, 2 POLE 3 WIRE GROUNDING, 20AMPERE 250VOLT**

APPROVALS / CERT'S.

CSA

UL


UL/FS

**ALL DIMENSIONS ARE IN MILLIMETERS**

MAXIMUM JACKET O.D. ACCEPTED BY INTERNAL STRAIN RELIEF = 15 DIA (0.591")  
 MAXIMUM CONDUCTOR SIZE ACCEPTED BY TERMINALS = 4.0 (12 AWG)

**CORDAGE PREPARATION**

<u>CONDUCTOR INSULATION COLOR</u>	<u>CONDUCTOR COLOR CODE</u>	<u>"LENGTH"</u>	<u>"STRIP"</u>
GREEN / YELLOW	GROUND	25	12
BLUE	NEUTRAL	25	12
BROWN	LINE	25	12

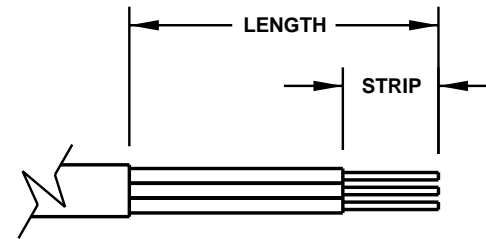

**CORDAGE PREPARATION**

