

CAT. No.
5469-XHG

NEMA6-20R STRAIGHT CONNECTOR, BLACK, HOSPITAL GRADE, 2 POLE 3 WIRE GROUNDING, 20 AMPERE 250 VOLT

APPROVALS / CERT'S.

UL


UL/FS

ALL DIMENSIONS ARE IN MILLIMETERS

MAXIMUM JACKET O.D. ACCEPTED BY INTERNAL STRAIN RELIEF = 15 DIA (0.591")
MAXIMUM CONDUCTOR SIZE ACCEPTED BY TERMINALS = 4.0 (12 AWG)

CORDAGE PREPARATION

<u>CONDUCTOR INSULATION COLOR</u>	<u>CONDUCTOR COLOR CODE</u>	<u>"LENGTH"</u>	<u>"STRIP"</u>
GREEN / YELLOW	GROUND	25	12
BLUE	NEUTRAL	25	12
BROWN	LINE	25	12

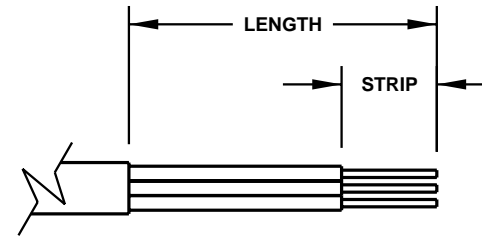

CORDAGE PREPARATION

