

CAT. No.  
**5666-BK**

**NEMASTRAIGHT BLADE PLUG, COMMERCIAL GRADE, BLACK, IMPACT RESISTANT NYLON, CORD GRIP RANGE  
0.230" - 0.625" (5.84 - 15.88 mm), 2 POLE 3 WIRE GROUNDING, 15 AMPERE 250 VOLT**

APPROVALS / CERT'S.


CSA  UL

**ALL DIMENSIONS ARE IN MILLIMETERS**

MAXIMUM JACKET O.D. ACCEPTED BY INTERNAL STRAIN RELIEF = 15 DIA (0.591")  
MAXIMUM CONDUCTOR SIZE ACCEPTED BY TERMINALS = 4.0 (12 AWG)

**CORDAGE PREPARATION**

<u>CONDUCTOR INSULATION COLOR</u>	<u>CONDUCTOR COLOR CODE</u>	<u>"LENGTH"</u>	<u>"STRIP"</u>
GREEN / YELLOW	GROUND	18	8
BLUE	NEUTRAL	18	8
BROWN	LINE	18	8

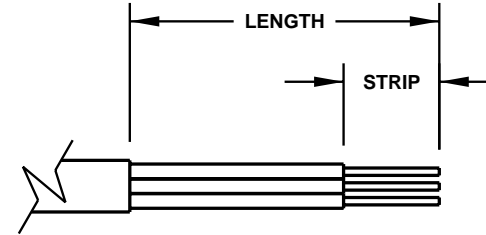

**CORDAGE PREPARATION**

