

CAT. No.  
**57020**

IEC 60320 C-17 CONNECTOR, STRAIGHT CORD GRIP, BLACK, 2 POLE 2 WIRE  
NON-GROUNDING, 10 AMPERE 250 VOLT. MATES WITH C-18 INLETS / PLUGS.  
STANDARD: IEC60320

APPROVALS / CERT'S.


CE

**ALL DIMENSIONS ARE IN MILLIMETERS**

MAXIMUM JACKET O.D. ACCEPTED BY EXTERNAL STRAIN RELIEF = 9 DIA (0.354")  
MAXIMUM JACKET O.D. ACCEPTED BY INTERNAL STRAIN RELIEF = 7 DIA (0.276")  
MAXIMUM CONDUCTOR SIZE ACCEPTED BY TERMINALS = 2.5 (14 AWG)

**CORDAGE PREPARATION**

CONDUCTOR <u>INSULATION COLOR</u>	CONDUCTOR <u>COLOR CODE</u>	"LENGTH"	"STRIP"
BLUE	NEUTRAL	20	5
BROWN	LINE	20	5

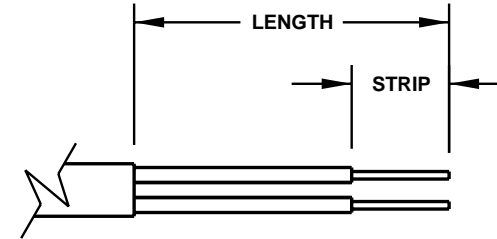

**CORDAGE PREPARATION**

