

CAT. No.  
**57030**


IEC 60320 (320) C-14 PLUG, STRAIGHT CORD GRIP, BLACK, BOX TYPE TERMINALS ACCEPT 14 AWG (2.5 mm)  
CONDUCTORS, 2 POLE 3 WIRE GROUNDING, RATED 10 AMP 250 VOLT  
STANDARD: IEC60320 (320)

APPROVALS / CERT'S. CSA  UL  VDE

**ALL DIMENSIONS ARE IN MILLIMETERS**

MAXIMUM JACKET O.D. ACCEPTED BY EXTERNAL STRAIN RELIEF = 7 DIA (0.276")  
MAXIMUM JACKET O.D. ACCEPTED BY INTERNAL STRAIN RELIEF = 8 DIA (0.315")  
MAXIMUM CONDUCTOR SIZE ACCEPTED BY TERMINALS = 2.5 (14 AWG)

<b>CORDAGE PREPARATION</b>			
<u>CONDUCTOR INSULATION COLOR</u>	<u>CONDUCTOR COLOR CODE</u>	<u>"LENGTH"</u>	<u>"STRIP"</u>
GREEN / YELLOW	GROUND	30	6
BLUE	NEUTRAL	26	6
BROWN	LINE	26	6

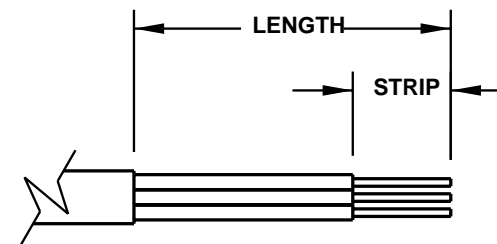

**CORDAGE PREPARATION**

