



CAT. No.


57035

IEC 60320 C-14 PLUG, DOWN ANGLE CORD GRIP, BLACK, SCREW TYPE TERMINALS ACCEPT 14 AWG (2.5 mm) CONDUCTORS, 2 POLE 3 WIRE GROUNDING, RATED 10 AMPERE, 250 VOLT (UL/CSA), 6 AMPERE, 250 VOLT (INT'L).

APPROVALS	CSA <input checked="" type="checkbox"/>	SEV <input checked="" type="checkbox"/>	UL <input checked="" type="checkbox"/>
CERTIFICATIONS	CE <input checked="" type="checkbox"/>	ROHS <input checked="" type="checkbox"/>	
STANDARDS	IEC 60320 <input checked="" type="checkbox"/>		

ALL DIMENSIONS ARE IN MILLIMETERS


CONFIGURATIONS	
RECEPTACLE	PLUG
	
IEC 60320 C-13	IEC 60320 C-14
	10 AMPERE 250 VOLT UL/CSA 6 AMPERE 250 VOLT INTERNATIONAL

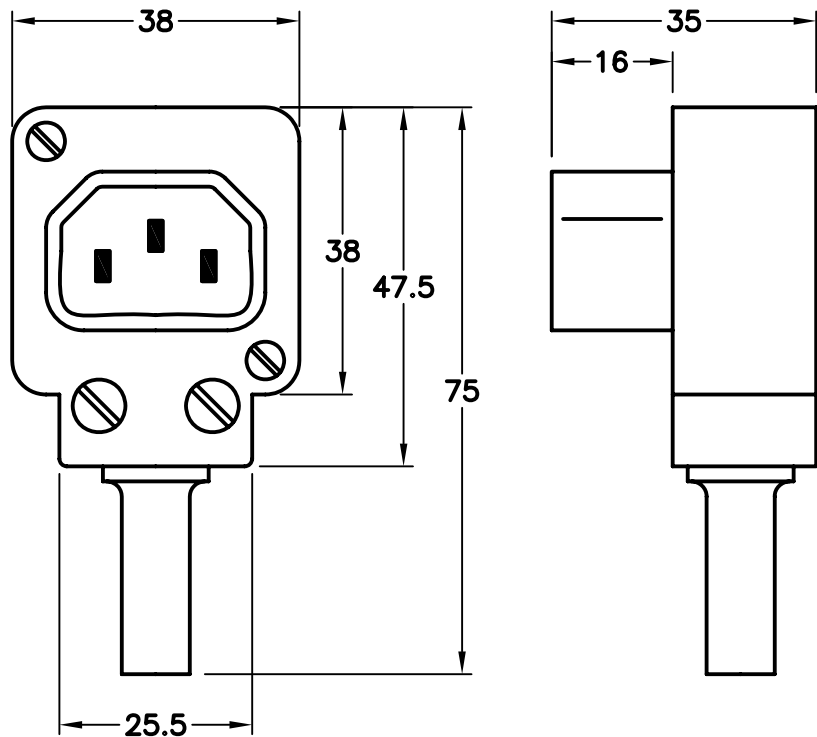

MAXIMUM JACKET O.D. ACCEPTED BY EXTERNAL STRAIN RELIEF = 8 DIA (0.315")
 MAXIMUM JACKET O.D. ACCEPTED BY INTERNAL STRAIN RELIEF = 8 DIA (0.315")
 MAXIMUM CONDUCTOR SIZE ACCEPTED BY TERMINALS = 2.5 (14 AWG)

CORDAGE PREPARATION

CONDUCTOR INSULATION COLOR	CONDUCTOR COLOR CODE	"LENGTH"	"STRIP"
GREEN/YELLOW	GROUND	33	5
BLUE	NEUTRAL	21	5
BROWN	LINE	18	5

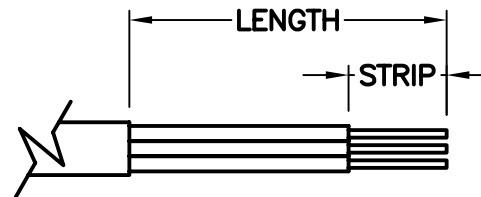

CORDAGE PREPARATION

International Configurations, Inc. P.O. Box 3374 Enfield, Connecticut 06083 TEL (860)749-6380 FAX (860)749-2985

www.InternationalConfig.com

sales@internationalconfig.com