

CAT. No.  
**57040A**

IEC 60320(320) C-14 PLUG, RIGHT ANGLE CORD GRIP, BLACK, BOX TYPE TERMINALS ACCEPT 14 AWG (2.5 mm)  
CONDUCTORS, 2 POLE 3 WIRE GROUNDING, RATED 10 AMP 250 VOLT  
STANDARD:IEC60320 (320)

APPROVALS / CERT'S.




**ALL DIMENSIONS ARE IN MILLIMETERS**

MAXIMUM JACKET O.D. ACCEPTED BY EXTERNAL STRAIN RELIEF = 7 DIA (0.276")  
MAXIMUM JACKET O.D. ACCEPTED BY INTERNAL STRAIN RELIEF = 10 DIA (0.394")  
MAXIMUM CONDUCTORSIZE ACCEPTED BY TERMINALS = 2.5 (14 AWG)

**CORDAGE PREPARATION**

CONDUCTOR INSULATION COLOR	CONDUCTOR COLOR CODE	"LENGTH"	"STRIP"
GREEN / YELLOW	GROUND	55	6
BLUE	NEUTRAL	53	6
BROWN	LINE	20	6

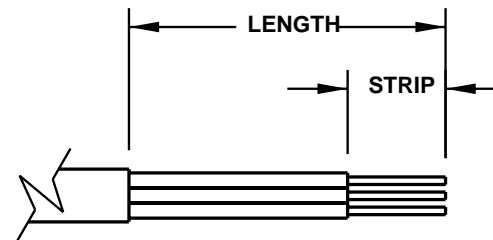

**CORDAGE PREPARATION**

