

CAT. No.
57040-NSL

IEC 60320 (320) C-14 PLUG, RIGHT ANGLE CORD GRIP, BLACK, BOX TYPE TERMINALS ACCEPT 14 AWG (2.5 mm)
CONDUCTORS, 2 POLE 3 WIRE GROUNDING, 10 AMP 250 VOLT
STANDARD: IEC60320 (320)

15 AMP 250 VOLT

APPROVALS / CERT'S.

CSA

UL

10AMP 250 VOLT

APPROVALS / CERT'S.


VDE

ALL DIMENSIONS ARE IN MILLIMETERS

MAXIMUM JACKET O.D. ACCEPTED BY EXTERNAL STRAIN RELIEF = 8 DIA (0.315")
MAXIMUM JACKET O.D. ACCEPTED BY INTERNAL STRAIN RELIEF = 8 DIA (0.315")
MAXIMUM CONDUCTOR SIZE ACCEPTED BY TERMINALS = 2.5 (14 AWG)

CORDAGE PREPARATION

<u>CONDUCTOR INSULATION COLOR</u>	<u>CONDUCTOR COLOR CODE</u>	<u>"LENGTH"</u>	<u>"STRIP"</u>
GREEN / YELLOW	GROUND	33	6
BLUE	NEUTRAL	45	6
BROWN	LINE	33	6

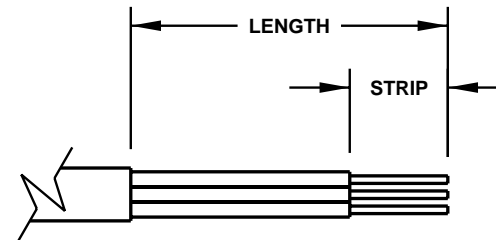

CORDAGE PREPARATION

