

CAT. No.
57045

IEC60320 (320) C-14 PLUG, LEFT ANGLE CORD GRIP, SCREW TYPE TERMINALS ACCEPT 16 AWG (1.5 mm)
CONDUCTORS, BLACK, 2 POLE 3 WIRE GROUNDING
STANDARD:IEC320 (60320)

15 AMP 250 VOLT

APPROVALS / CERT'S.

CSA UL

10AMP 250 VOLT

APPROVALS / CERT'S.


SEV VDE

ALL DIMENSIONS ARE IN MILLIMETERS

MAXIMUM JACKET O.D. ACCEPTED BY EXTERNAL STRAIN RELIEF = 7 DIA (0.276")
MAXIMUM JACKET O.D. ACCEPTED BY INTERNAL STRAIN RELIEF = 7 DIA (0.276")
MAXIMUM CONDUCTORSIZE ACCEPTED BY TERMINALS = 1.5 (16 AWG)

CORDAGE PREPARATION

<u>CONDUCTOR INSULATION COLOR</u>	<u>CONDUCTOR COLOR CODE</u>	<u>"LENGTH"</u>	<u>"STRIP"</u>
GREEN / YELLOW	GROUND	22	6
BLUE	NEUTRAL	35	6
BROWN	LINE	22	6

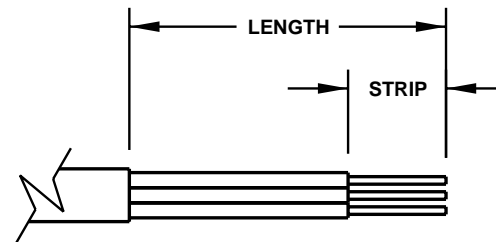

CORDAGE PREPARATION

