

CAT. No.
57050A

IEC 60320(320) C-13,C-15 CONNECTOR, STRAIGHT CORD GRIP, BLACK, BOX TYPE TERMINALS ACCEPT 12 AWG (4.0 mm) CONDUCTORS, 2 POLE 3 WIRE GROUNDING, RATED 10 AMP 250 VOLT
STANDARD:IEC320

APPROVALS / CERT'S.




ALL DIMENSIONS ARE IN MILLIMETERS

MAXIMUM JACKET O.D. ACCEPTED BY EXTERNAL STRAIN RELIEF = 9 DIA (0.354")
MAXIMUM JACKET O.D. ACCEPTED BY INTERNAL STRAIN RELIEF = 10 DIA (0.394")
MAXIMUM CONDUCTOR SIZE ACCEPTED BY TERMINALS = 4.0 (12 AWG)

CORDAGE PREPARATION

CONDUCTOR INSULATION COLOR	CONDUCTOR COLOR CODE	"LENGTH"	"STRIP"
GREEN / YELLOW	GROUND	20	6
BLUE	NEUTRAL	28	6
BROWN	LINE	28	6

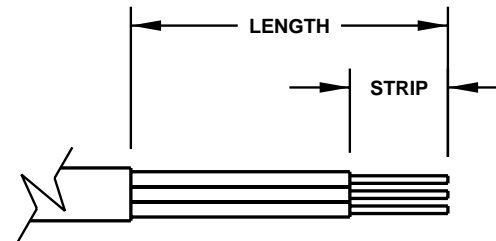

CORDAGE PREPARATION

