

CAT. No.  
**57050-NS**


IEC 60320(320) C-13,C-15 CONNECTOR, STRAIGHT CORD GRIP, BLACK, BOX TYPE TERMINALS ACCEPT 14 AWG  
(2.5 mm) CONDUCTORS, 2 POLE 3 WIRE GROUNDING  
STANDARD:IEC60320 (320)

15 AMP 250 VOLT	APPROVALS / CERT'S.	CSA <input checked="" type="checkbox"/>	UL <input checked="" type="checkbox"/>
10AMP 250 VOLT	APPROVALS / CERT'S.	BSI <input checked="" type="checkbox"/>	VDE <input checked="" type="checkbox"/>

**ALL DIMENSIONS ARE IN MILLIMETERS**

MAXIMUM JACKET O.D. ACCEPTED BY EXTERNAL STRAIN RELIEF = 7 DIA (0.276")  
MAXIMUM JACKET O.D. ACCEPTED BY INTERNAL STRAIN RELIEF = 10 DIA (0.394")  
MAXIMUM CONDUCTOR SIZE ACCEPTED BY TERMINALS = 2.5 (14 AWG)

<b>CORDAGE PREPARATION</b>			
<u>CONDUCTOR INSULATION COLOR</u>	<u>CONDUCTOR COLOR CODE</u>	<u>"LENGTH"</u>	<u>"STRIP"</u>
GREEN / YELLOW	GROUND	33	6
BLUE	NEUTRAL	33	6
BROWN	LINE	33	6

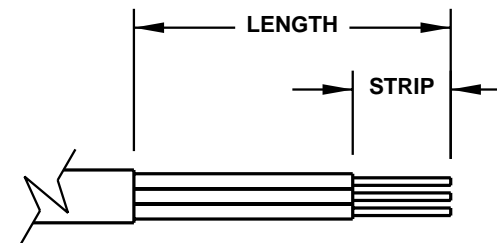

**CORDAGE PREPARATION**

