

CAT. No.
57050

IEC 60320(320) C-13 CONNECTOR, STRAIGHT CORD GRIP, BLACK, SCREW TYPE TERMINALS
ACCEPT 16 AWG (1.5 mm) CONDUCTORS, 2 POLE 3 WIRE GROUNDING, RATED 15 AMP 250 VOLT
(UL/CSA), 10 AMP 250 VOLT(INT'L). STANDARD:IEC60320 (320)

APPROVALS / CERT'S.


CE CSA OVE SEMKO SEV UL VDE

ALL DIMENSIONS ARE IN MILLIMETERS

MAXIMUM JACKET O.D. ACCEPTED BY EXTERNAL STRAIN RELIEF = 9 DIA (0.354")
 MAXIMUM JACKET O.D. ACCEPTED BY INTERNAL STRAIN RELIEF = 9 DIA (0.354")
 MAXIMUM CONDUCTOR SIZE ACCEPTED BY TERMINALS = 1.5 (16 AWG)

CORDAGE PREPARATION

CONDUCTOR INSULATION COLOR	CONDUCTOR COLOR CODE	"LENGTH"	"STRIP"
GREEN / YELLOW	GROUND	28	6
BLUE	NEUTRAL	28	6
BROWN	LINE	28	6

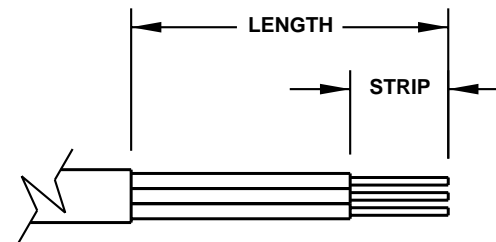

CORDAGE PREPARATION

