

CAT. No.  
**57055-M**

IEC 60320 (320) C-13 CONNECTOR BODY, STRAIGHT CORD GRIP WITH DUST / MOISTURE SHIELD, BLACK, CLAMP TYPE TERMINALS ACCEPT 12 AWG (4.0 mm) CONDUCTORS, CORD GRIP RANGE 0.360" - 0.655" (9.0 - 16.5 mm), 2 POLE 3 WIRE GROUNDING, RATED 15 AMPERE, 125 VOLT, 10 AMPERE, 250 VOLT.

APPROVALS / CERT'S.

CSA  UL


**ALL DIMENSIONS ARE IN MILLIMETERS**

MAXIMUM JACKET O.D. ACCEPTED BY EXTERNAL STRAIN RELIEF = 16.5 DIA (0.655")  
 MAXIMUM JACKET O.D. ACCEPTED BY INTERNAL STRAIN RELIEF = 16.5 DIA (0.655")  
 MAXIMUM CONDUCTOR SIZE ACCEPTED BY TERMINALS = 4.0 (12 AWG)

**CORDAGE PREPARATION**

CONDUCTOR INSULATION COLOR	CONDUCTOR COLOR CODE	"LENGTH"	"STRIP"
GREEN / YELLOW	GROUND	32	12
BLUE	NEUTRAL	32	12
BROWN	LINE	32	12

RECOMMENDED TERMINAL TORQUE = 1.36 NEWTON METERS

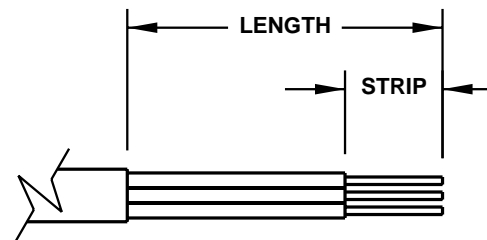

**CORDAGE PREPARATION**

