

CAT. No.
57055-NS

IEC 60320 (320) C-13 CONNECTOR BODY, STRAIGHT CORD GRIP, BLACK, BOX TYPE TERMINALS ACCEPT 14 AWG (2.5 mm) CONDUCTORS, 2 POLE 3 WIRE GROUNDING
STANDARD: IEC 320

15 AMP 250 VOLT

APPROVALS / CERT'S.

CSA

UL

10 AMP 250 VOLT

APPROVALS / CERT'S.

VDE


ALL DIMENSIONS ARE IN MILLIMETERS

MAXIMUM JACKET O.D. ACCEPTED BY EXTERNAL STRAIN RELIEF = 7 DIA (0.276")
MAXIMUM JACKET O.D. ACCEPTED BY INTERNAL STRAIN RELIEF = 10 DIA (0.394")
MAXIMUM CONDUCTOR SIZE ACCEPTED BY TERMINALS = 2.5 (14 AWG)

CORDAGE PREPARATION

| CONDUCTOR INSULATION COLOR | CONDUCTOR COLOR CODE | "LENGTH" | "STRIP" |
|----------------------------|----------------------|----------|---------|
| GREEN / YELLOW | GROUND | 35 | 6 |
| BLUE | NEUTRAL | 30 | 6 |
| BROWN | LINE | 30 | 6 |

RECOMMENDED TERMINAL TORQUE = 0.4 - 0.5 NEWTON METERS

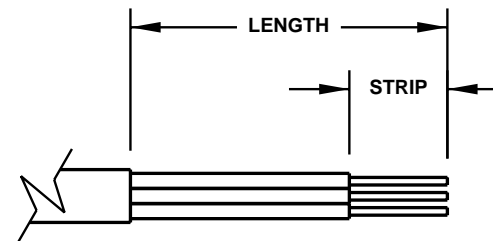

CORDAGE PREPARATION

