

CAT. No.
57055-NSL

IEC 60320 (320) C-13 CONNECTOR BODY, STRAIGHT CORD GRIP, BLACK, BOX TYPE TERMINALS ACCEPT 14 AWG (2.5 mm) CONDUCTORS, 2 POLE 3 WIRE GROUNDING
STANDARD: IEC 320

15 AMP 250 VOLT

APPROVALS / CERT'S.

CSA

UL

10 AMP 250 VOLT

APPROVALS / CERT'S.

VDE


ALL DIMENSIONS ARE IN MILLIMETERS

MAXIMUM JACKET O.D. ACCEPTED BY EXTERNAL STRAIN RELIEF = 8.5 DIA (0.335")
MAXIMUM JACKET O.D. ACCEPTED BY INTERNAL STRAIN RELIEF = 10 DIA (0.394")
MAXIMUM CONDUCTOR SIZE ACCEPTED BY TERMINALS = 2.5 (14 AWG)

CORDAGE PREPARATION

CONDUCTOR INSULATION COLOR	CONDUCTOR COLOR CODE	"LENGTH"	"STRIP"
GREEN / YELLOW	GROUND	35	6
BLUE	NEUTRAL	30	6
BROWN	LINE	30	6

RECOMMENDED TERMINAL TORQUE = 0.4 - 0.5 NEWTON METERS

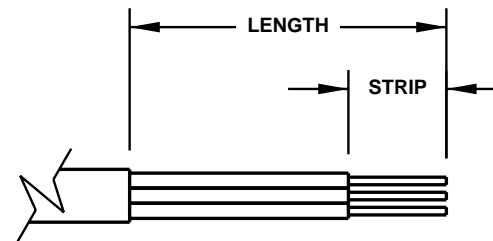

CORDAGE PREPARATION

