

CAT. No.
57055

IEC 60320 (320) C-13 CONNECTOR BODY, STRAIGHT CORD GRIP, BLACK, SCREW TYPE TERMINALS ACCEPT
14 AWG (2.5 mm) CONDUCTORS, 2 POLE 3 WIRE GROUNDING, 10 AMP 250 VOLT
STANDARD:IEC320

APPROVALS / CERT'S.




ALL DIMENSIONS ARE IN MILLIMETERS

MAXIMUM JACKET O.D. ACCEPTED BY EXTERNAL STRAIN RELIEF = 7 DIA (0.276")
MAXIMUM JACKET O.D. ACCEPTED BY INTERNAL STRAIN RELIEF = 8 DIA (0.315")
MAXIMUM CONDUCTOR SIZE ACCEPTED BY TERMINALS = 2.5 (14 AWG)

CORDAGE PREPARATION

CONDUCTOR INSULATION COLOR	CONDUCTOR COLOR CODE	"LENGTH"	"STRIP"
GREEN / YELLOW	GROUND	15	6
BLUE	NEUTRAL	20	6
BROWN	LINE	20	6

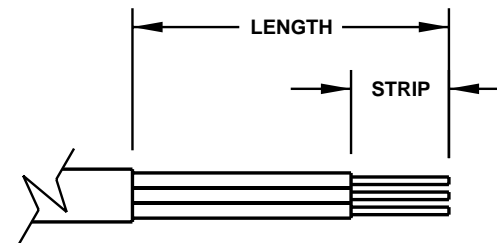

CORDAGE PREPARATION

