

CAT. No.  
**57060A**

IEC 60320 (320) C-13, C-15 CONNECTOR, RIGHT ANGLE CORDGRIP, BARREL TYPE TERMINALS ACCEPT 14 AWG (2.5MM) CONDUCTORS, BLACK, 2 POLE 3 WIRE GROUNDING, 10 AMP 250 VOLT  
STANDARD: IEC320



APPROVALS / CERT'S.    CEBEC     DEMKO     FI     KEMA     NEMKO     OVE     SEMKO     SEV     VDE

**ALL DIMENSIONS ARE IN MILLIMETERS**

MAXIMUM JACKET O.D. ACCEPTED BY EXTERNAL STRAIN RELIEF = 8.5 DIA (0.335")  
MAXIMUM JACKET O.D. ACCEPTED BY INTERNAL STRAIN RELIEF = 9 DIA (0.354")  
MAXIMUM CONDUCTOR SIZE ACCEPTED BY TERMINALS = 2.5 (14 AWG)

**CORDAGE PREPARATION**

<u>CONDUCTOR INSULATION COLOR</u>	<u>CONDUCTOR COLOR CODE</u>	<u>"LENGTH"</u>	<u>"STRIP"</u>
GREEN / YELLOW	GROUND	36	6
BLUE	NEUTRAL	20	6
BROWN	LINE	46	6

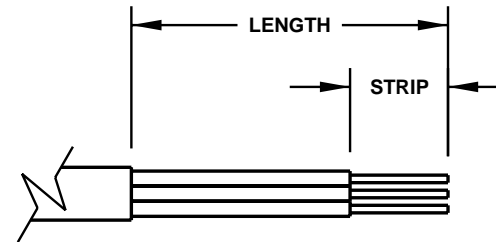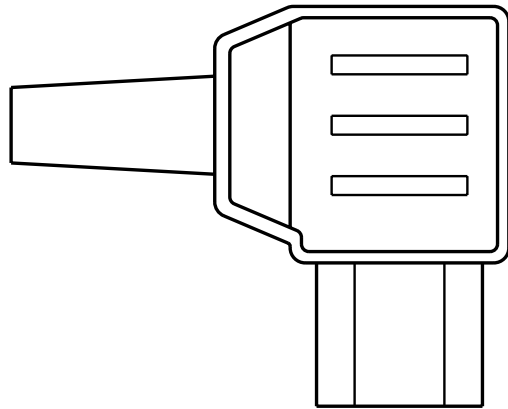

**CORDAGE PREPARATION**

