

CAT. No.  
**57060-NSL**

IEC 60320 (320) C-13,C-15 CONNECTOR, RIGHT ANGLE CORD GRIP, BLACK, BOX TYPE TERMINALS ACCEPT 14 AWG (2.5 mm) CONDUCTORS, 2 POLE 3 WIRE GROUNDING STANDARD:IEC60320 (320)

15 AMP 250 VOLT

APPROVALS / CERT'S.

CSA

UL

10AMP 250 VOLT

APPROVALS / CERT'S.


VDE

**ALL DIMENSIONS ARE IN MILLIMETERS**

MAXIMUM JACKET O.D. ACCEPTED BY EXTERNAL STRAIN RELIEF = 8.5 DIA (0.315")  
 MAXIMUM JACKET O.D. ACCEPTED BY INTERNAL STRAIN RELIEF = 10 DIA (0.394")  
 MAXIMUM CONDUCTOR SIZE ACCEPTED BY TERMINALS = 2.5 (14 AWG)

**CORDAGE PREPARATION**

| CONDUCTOR INSULATION COLOR | CONDUCTOR COLOR CODE | "LENGTH" | "STRIP" |
|----------------------------|----------------------|----------|---------|
| GREEN / YELLOW             | GROUND               | 33       | 6       |
| BLUE                       | NEUTRAL              | 22       | 6       |
| BROWN                      | LINE                 | 50       | 6       |

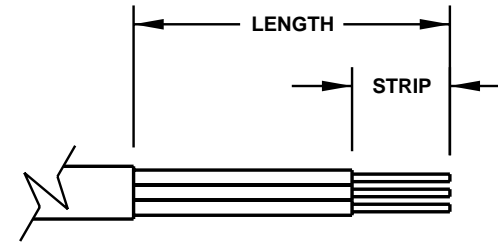

**CORDAGE PREPARATION**

