

CAT. No.
57060

IEC 60320 (320) C-13, C-15 CONNECTOR, RIGHT ANGLE CORD GRIP, SCREW TYPE TERMINALS ACCEPT 16 AWG (1.5 mm) CONDUCTORS, BLACK, 2 POLE 3 WIRE
STANDARD:IEC320

10A 250V APPROVALS / CERT'S. OVE SEMKO SEV VDE


15A 250V APPROVALS / CERT'S. CSA UL

ALL DIMENSIONS ARE IN MILLIMETERS

MAXIMUM JACKET O.D. ACCEPTED BY EXTERNAL STRAIN RELIEF = 8.5 DIA (0.335")
MAXIMUM JACKET O.D. ACCEPTED BY INTERNAL STRAIN RELIEF = 10 DIA (0.394")
MAXIMUM CONDUCTORSIZE ACCEPTED BY TERMINALS = 1.5 (16 AWG)

CORDAGE PREPARATION

CONDUCTOR INSULATION COLOR	CONDUCTOR COLOR CODE	"LENGTH"	"STRIP"
GREEN / YELLOW	GROUND	34	6
BLUE	NEUTRAL	30	6
BROWN	LINE	47	6

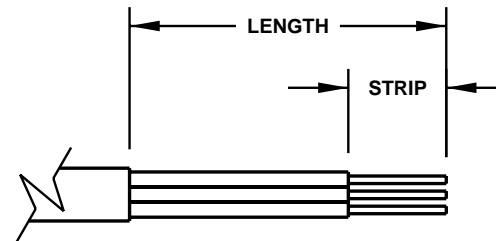

CORDAGE PREPARATION

