


CAT. No.
57065-NS

IEC 60320(320) C-13 CONNECTOR BODY, RIGHT ANGLE CABLE ENTRY, BLACK, BOX TYPE TERMINALS ACCEPT
14 AWG (2.5 mm) CONDUCTORS, 2 POLE 3 WIRE GROUNDING
STANDARD:IEC320

15 AMP 250 VOLT	APPROVALS / CERT'S.	CSA <input checked="" type="checkbox"/>	UL <input checked="" type="checkbox"/>
10AMP 250 VOLT	APPROVALS / CERT'S.	BSI <input checked="" type="checkbox"/>	VDE <input checked="" type="checkbox"/>

ALL DIMENSIONS ARE IN MILLIMETERS

MAXIMUM JACKET O.D. ACCEPTED BY EXTERNAL STRAIN RELIEF = 7 DIA (0.276") MAXIMUM JACKET O.D. ACCEPTED BY INTERNAL STRAIN RELIEF = 8 DIA (0.315") MAXIMUM CONDUCTORSIZE ACCEPTED BY TERMINALS = 2.5 (14 AWG)			
CORDAGE PREPARATION			
<u>CONDUCTOR INSULATION COLOR</u>	<u>CONDUCTOR COLOR CODE</u>	<u>"LENGTH"</u>	<u>"STRIP"</u>
GREEN / YELLOW	GROUND	45	6
BLUE	NEUTRAL	25	6
BROWN	LINE	50	6

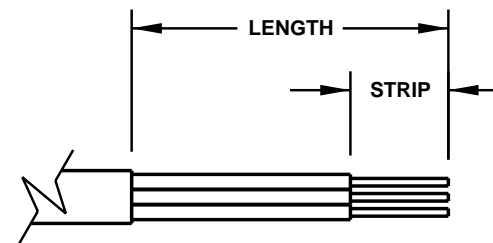

CORDAGE PREPARATION

