

CAT. No.
57065-NSL

IEC 60320(320) C-13 CONNECTOR BODY, RIGHT ANGLE CABLE ENTRY, BLACK, BOX TYPE TERMINALS ACCEPT
14 AWG (2.5 mm) CONDUCTORS, 2 POLE 3 WIRE GROUNDING
STANDARD:IEC320


15 AMP 250 VOLT	APPROVALS / CERT'S.	CSA <input checked="" type="checkbox"/>	UL <input checked="" type="checkbox"/>
10AMP 250 VOLT	APPROVALS / CERT'S.	VDE <input checked="" type="checkbox"/>	

ALL DIMENSIONS ARE IN MILLIMETERS

MAXIMUM JACKET O.D. ACCEPTED BY EXTERNAL STRAIN RELIEF = 8.5 DIA (0.335")
MAXIMUM JACKET O.D. ACCEPTED BY INTERNAL STRAIN RELIEF = 10 DIA (0.394")
MAXIMUM CONDUCTORSIZE ACCEPTED BY TERMINALS = 2.5 (14 AWG)

CORDAGE PREPARATION

CONDUCTOR INSULATION COLOR	CONDUCTOR COLOR CODE	"LENGTH"	"STRIP"
GREEN / YELLOW	GROUND	45	6
BLUE	NEUTRAL	25	6
BROWN	LINE	50	6

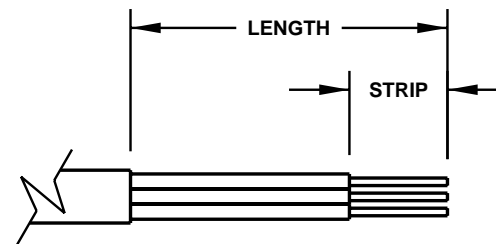

CORDAGE PREPARATION

