

CAT. No.  
**57065**

IEC 60320(320) C-13 CONNECTOR BODY, RIGHT ANGLE CABLE ENTRY, BLACK, SCREW TYPE TERMINALS  
ACCEPT 14 AWG (2.5 mm) CONDUCTORS, 2 POLE 3 WIRE GROUNDING, 10 AMP 250 VOLT  
STANDARD: IEC320

APPROVALS / CERT'S.




**ALL DIMENSIONS ARE IN MILLIMETERS**

MAXIMUM JACKET O.D. ACCEPTED BY EXTERNAL STRAIN RELIEF = 7 DIA (0.276")  
MAXIMUM JACKET O.D. ACCEPTED BY INTERNAL STRAIN RELIEF = 8 DIA (0.315")  
MAXIMUM CONDUCTOR SIZE ACCEPTED BY TERMINALS = 2.5 (14 AWG)

**CORDAGE PREPARATION**

<u>CONDUCTOR INSULATION COLOR</u>	<u>CONDUCTOR COLOR CODE</u>	<u>"LENGTH"</u>	<u>"STRIP"</u>
GREEN / YELLOW	GROUND	32	6
BLUE	NEUTRAL	32	6
BROWN	LINE	41	6

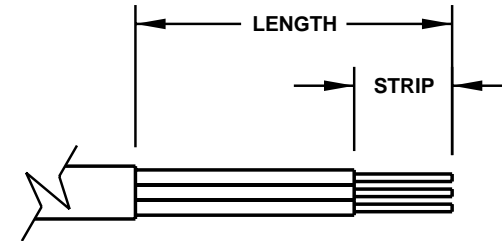

**CORDAGE PREPARATION**

