

CAT. No.  
**57070A**

IEC 60320 (320) C-13 65°C DOWN ANGLE CONNECTOR, BOXTYPE TERMINALS ACCEPT 14 AWG (2.5 mm) CONDUCTORS, BLACK, 2 POLE 3 WIRE GROUNDING, RATED 10 AMP 250 VOLT  
STANDARD:IEC320

APPROVALS / CERT'S.


CE  CEBEC  DEMKO  FI  KEMA  NEMKO  OVE  SEMKO  SEV  VDE

**ALL DIMENSIONS ARE IN MILLIMETERS**

MAXIMUM JACKET O.D. ACCEPTED BY EXTERNAL STRAIN RELIEF = 8.5 DIA (0.335")  
 MAXIMUM JACKET O.D. ACCEPTED BY INTERNAL STRAIN RELIEF = 9 DIA (0.354")  
 MAXIMUM CONDUCTOR SIZE ACCEPTED BY TERMINALS = 2.5 (14 AWG)

**CORDAGE PREPARATION**

CONDUCTOR INSULATION COLOR	CONDUCTOR COLOR CODE	"LENGTH"	"STRIP"
GREEN / YELLOW	GROUND	33	5
BLUE	NEUTRAL	26	5
BROWN	LINE	26	5

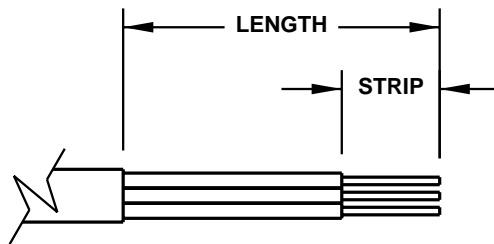

**CORDAGE PREPARATION**

