
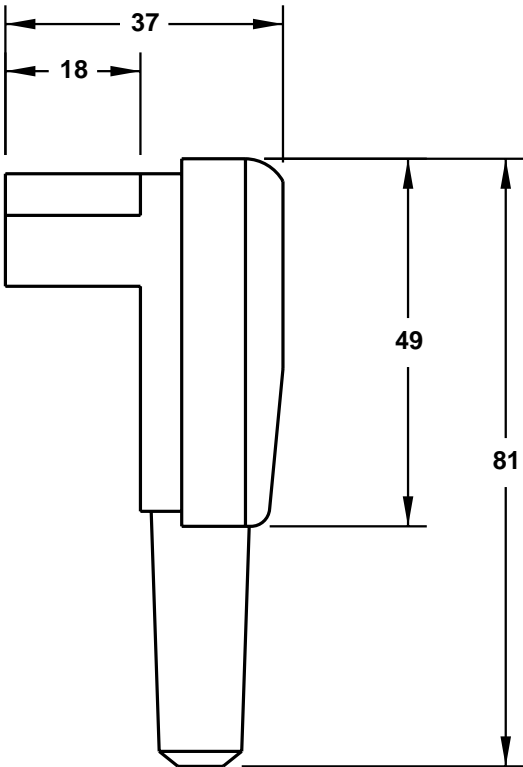
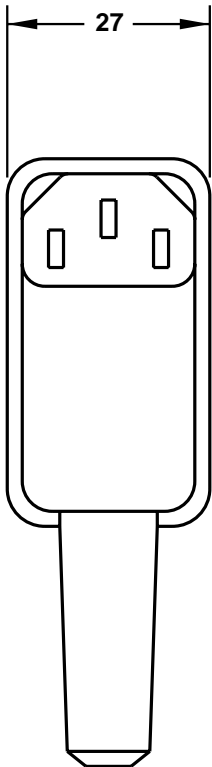


CAT. No.
57070

IEC 60320 (320) C-13 CONNECTOR, DOWN ANGLE CORD GRIP, SCREW TYPE TERMINALS ACCEPT 14 AWG (2.5 mm) CONDUCTORS, BLACK, 2 POLE 3 WIRE GROUNDING, 15 AMP 125/250 VOLT (UL-CSA), 10 AMP 250 VOLT (EUROPEAN) STANDARD:IEC320

10A 250V	APPROVALS / CERT'S.	<input checked="" type="checkbox"/> CE	<input checked="" type="checkbox"/> DEMKO	<input checked="" type="checkbox"/> FI	<input checked="" type="checkbox"/> KEMA	<input checked="" type="checkbox"/> NEMKO	<input checked="" type="checkbox"/> SEMKO	<input checked="" type="checkbox"/> SEV	<input checked="" type="checkbox"/> VDE
15A 125/250V	APPROVALS / CERT'S.	<input checked="" type="checkbox"/> CSA	<input checked="" type="checkbox"/> UL						


ALL DIMENSIONS ARE IN MILLIMETERS



MAXIMUM JACKET O.D. ACCEPTED BY EXTERNAL STRAIN RELIEF = 9 DIA (0.354")
 MAXIMUM JACKET O.D. ACCEPTED BY INTERNAL STRAIN RELIEF = 10 DIA (0.394")
 MAXIMUM CONDUCTORSIZE ACCEPTED BY TERMINALS = 2.5 (14 AWG)

CORDAGE PREPARATION

<u>CONDUCTOR INSULATION COLOR</u>	<u>CONDUCTOR COLOR CODE</u>	<u>"LENGTH"</u>	<u>"STRIP"</u>
GREEN / YELLOW	GROUND	20	6
BLUE	NEUTRAL	25	6
BROWN	LINE	25	6

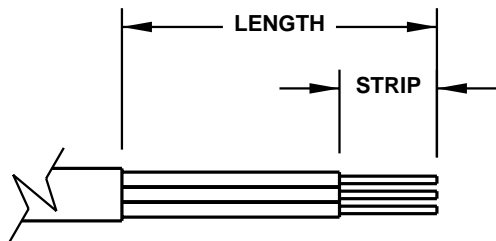

CORDAGE PREPARATION