

CAT. No.

**57075**

IEC60320 (320) C-13, C-15 CONNECTOR, LEFT ANGLE CORD GRIP, SCREW TYPE TERMINALS ACCEPT 16 AWG (1.5 mm) CONDUCTORS, BLACK, 2 POLE 3 WIRE GROUNDING  
STANDARD:IEC320 (60320)

15 AMP 250 VOLT APPROVALS / CERT'S. CSA  UL


10AMP 250 VOLT APPROVALS / CERT'S. SEV  VDE

### ALL DIMENSIONS ARE IN MILLIMETERS

MAXIMUM JACKET O.D. ACCEPTED BY EXTERNAL STRAIN RELIEF = 7 DIA (0.276")  
MAXIMUM JACKET O.D. ACCEPTED BY INTERNAL STRAIN RELIEF = 7 DIA (0.276")  
MAXIMUM CONDUCTORSIZE ACCEPTED BY TERMINALS = 1.5 (16 AWG)

#### CORDAGE PREPARATION

<u>CONDUCTOR INSULATION COLOR</u>	<u>CONDUCTOR COLOR CODE</u>	<u>"LENGTH"</u>	<u>"STRIP"</u>
GREEN / YELLOW	GROUND	22	6
BLUE	NEUTRAL	35	6
BROWN	LINE	22	6

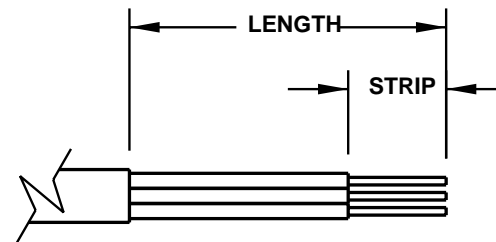

CORDAGE PREPARATION

