

CAT. No.  
**57085**

IEC 60320 (320) C-15 65°C DOWN ANGLE CONNECTOR, BOX TYPE TERMINALS ACCEPT 14 AWG (2.5 mm)  
CONDUCTORS, BLACK, 2 POLE 3 WIRE GROUNDING, RATED 10 AMP 250 VOLT  
STANDARD: IEC 60320


APPROVALS / CERT'S.  CEBC  DEMKO  FI  KEMA  NEMKO  OVE  SEMKO  SEV  VDE

## ALL DIMENSIONS ARE IN MILLIMETERS


MAXIMUM JACKET O.D. ACCEPTED BY EXTERNAL STRAIN RELIEF = 8.5 DIA (0.335")  
MAXIMUM JACKET O.D. ACCEPTED BY INTERNAL STRAIN RELIEF = 9 DIA (0.354")  
MAXIMUM CONDUCTOR SIZE ACCEPTED BY TERMINALS = 2.5 (14 AWG)

### CORDAGE PREPARATION


CONDUCTOR INSULATION COLOR	CONDUCTOR COLOR CODE	"LENGTH"	"STRIP"
GREEN / YELLOW	GROUND	33	5
BLUE	NEUTRAL	26	5
BROWN	LINE	26	5

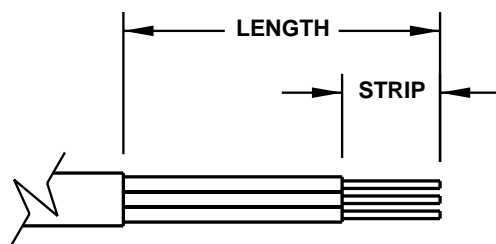

CORDAGE PREPARATION




28

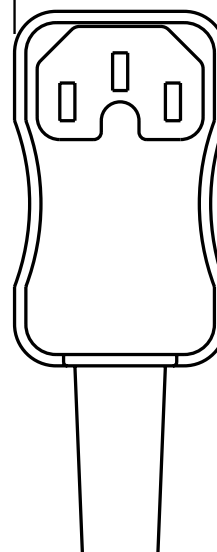

40

19.5

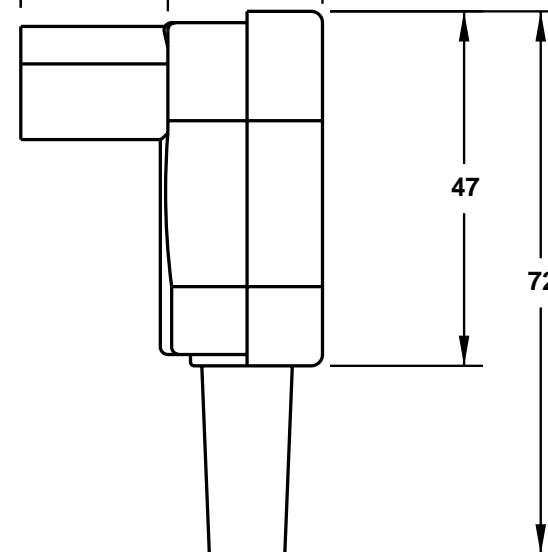

47

72

www.InternationalConfig.com  
sales@internationalconfig.com