

CAT. No.

57090A

IEC3 20 C-19 CONNECTOR, STRAIGHT CORD GRIP, BLACK, 2 POLE 3 WIRE, 20 AMP 250 VOLT

STANDARD:IEC320 C-19


APPROVALS / CERT'S.

CSA UL

ALL DIMENSIONS ARE IN MILLIMETERS

MAXIMUM JACKET O.D. ACCEPTED BY EXTERNAL STRAIN RELIEF = 9 DIA (0.354")
 MAXIMUM JACKET O.D. ACCEPTED BY INTERNAL STRAIN RELIEF = 11 DIA (0.433")
 MAXIMUM CONDUCTOR SIZE ACCEPTED BY TERMINALS = 4.0 (12 AWG)

<u>CORDAGE PREPARATION</u>			
<u>CONDUCTOR INSULATION COLOR</u>	<u>CONDUCTOR COLOR CODE</u>	<u>"LENGTH"</u>	<u>"STRIP"</u>
GREEN / YELLOW	GROUND	38	6
BLUE	NUETRAL	38	6
BROWN	LINE	38	6

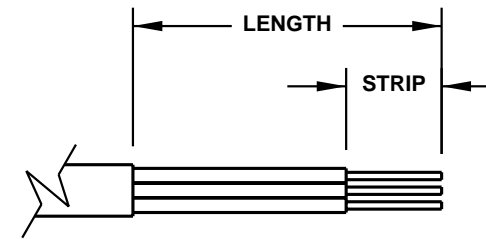

CORDAGE PREPARATION

