

CAT. No.
57090DA

IEC 320 C-19 CONNECTOR, STRAIGHT CORD GRIP, BLACK, 2 POLE 3 WIRE, 16 / 20 AMP 250 VOLT

STANDARD: IEC320 C-19

16A 250V

APPROVALS / CERT'S.

SEV

VDE

20A 250V

APPROVALS / CERT'S.

CSA


UL

ALL DIMENSIONS ARE IN MILLIMETERS

MAXIMUM JACKET O.D. ACCEPTED BY EXTERNAL STRAIN RELIEF = 9 DIA (0.354")
 MAXIMUM JACKET O.D. ACCEPTED BY INTERNAL STRAIN RELIEF = 10 DIA (0.394")
 MAXIMUM CONDUCTOR SIZE ACCEPTED BY TERMINALS = 4.0 (12 AWG)

CORDAGE PREPARATION

CONDUCTOR INSULATION COLOR	CONDUCTOR COLOR CODE	"LENGTH"	"STRIP"
GREEN / YELLOW	GROUND	16	6
BLUE	NUETRAL	26	6
BROWN	LINE	26	6

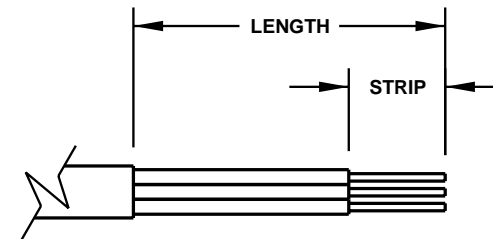

CORDAGE PREPARATION

