

CAT. No.
57090-K

IEC 60320 C-19 CONNECTOR, STRAIGHT CORD GRIP, BLACK, 2 POLE 3 WIRE, 16 AMPERE 250 VOLT

STANDARD: IEC60320 C-19


APPROVALS / CERT'S. VDE ENEC

ALL DIMENSIONS ARE IN MILLIMETERS



MAXIMUM JACKET O.D. ACCEPTED BY EXTERNAL STRAIN RELIEF = 10 DIA (0.394")
 MAXIMUM JACKET O.D. ACCEPTED BY INTERNAL STRAIN RELIEF = 10 DIA (0.394")
 MAXIMUM CONDUCTOR SIZE ACCEPTED BY TERMINALS = 6.0 (10 AWG)

CORDAGE PREPARATION

CONDUCTOR INSULATION COLOR	CONDUCTOR COLOR CODE	"LENGTH"	"STRIP"
GREEN / YELLOW	GROUND	20	6
BLUE	NEUTRAL	20	6
BROWN	LINE	20	6

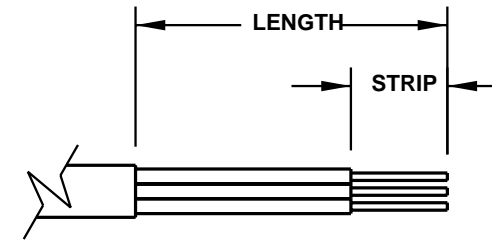

CORDAGE PREPARATION

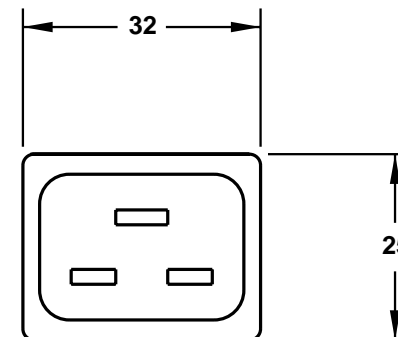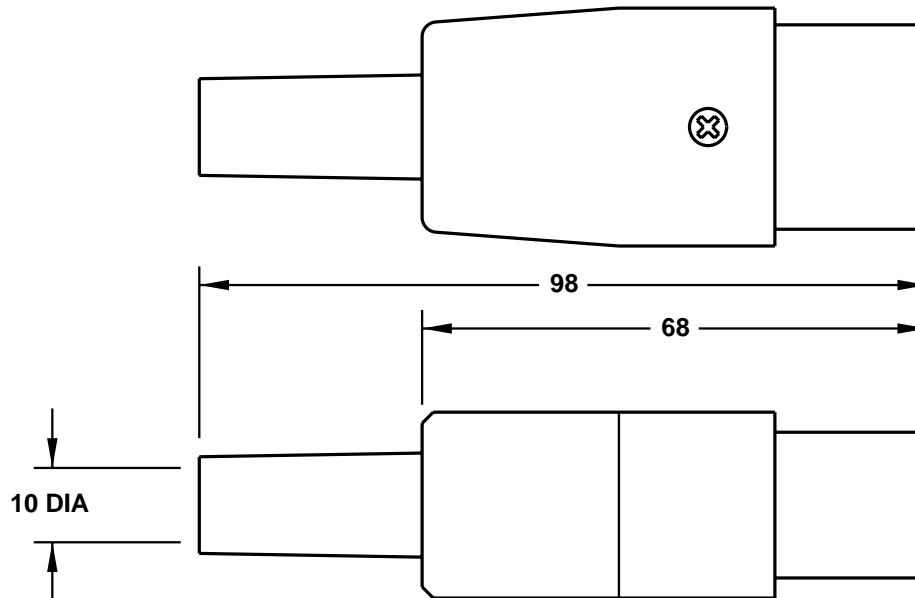

www.InternationalConfig.com
sales@internationalconfig.com