

CAT. No.
57090-M

IEC 60320(320) C-19 CONNECTOR BODY, STRAIGHT CORD GRIP WITH DUST / MOISTURE SHIELD, BLACK, CLAMP TYPE TERMINALS ACCEPT 10 AWG (4.0 mm) CONDUCTORS, CORD GRIP RANGE 0.360" - 0.655" (9.0 - 16.5 mm), 2 POLE 3 WIRE GROUNDING, RATED 20 AMPERE 250 VOLTS.

APPROVALS / CERT'S. CSA UL


ALL DIMENSIONS ARE IN MILLIMETERS

MAXIMUM JACKET O.D. ACCEPTED BY EXTERNAL STRAIN RELIEF = 16.5 DIA (0.655")
 MAXIMUM JACKET O.D. ACCEPTED BY INTERNAL STRAIN RELIEF = 16.5 DIA (0.655")
 MAXIMUM CONDUCTOR SIZE ACCEPTED BY TERMINALS = 4.0 (10 AWG)

CORDAGE PREPARATION

CONDUCTOR INSULATION COLOR	CONDUCTOR COLOR CODE	"LENGTH"	"STRIP"
GREEN / YELLOW	GROUND	32	12
BLUE	NEUTRAL	32	12
BROWN	LINE	32	12

RECOMMENDED TERMINAL TORQUE = 1.36 NEWTON METERS

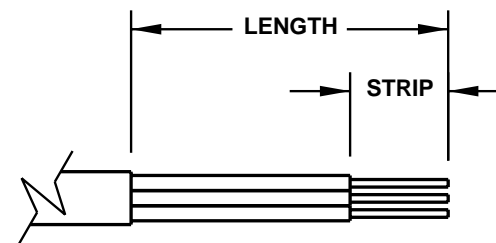

CORDAGE PREPARATION

