

CAT. No.
57090-V

IEC 60320 (320) C-19 CONNECTOR, STRAIGHT CORD GRIP WITH HINGED COVER, BLACK, 2 POLE 3 WIRE,
CSA / UL RATED 20 AMPERE 250 VOLT, IEC 60320 RATED 16 AMPERE 250 VOLT
STANDARD: IEC 60320 (320) C-19


APPROVALS / CERT'S. CSA UL

ALL DIMENSIONS ARE IN MILLIMETERS

MAXIMUM JACKET O.D. ACCEPTED BY EXTERNAL STRAIN RELIEF = 12 DIA (0.472")
MAXIMUM JACKET O.D. ACCEPTED BY INTERNAL STRAIN RELIEF = 12 DIA (0.472")
MAXIMUM CONDUCTOR SIZE ACCEPTED BY TERMINALS = 4.0 (12 AWG)

CORDAGE PREPARATION

CONDUCTOR INSULATION COLOR	CONDUCTOR COLOR CODE	"LENGTH"	"STRIP"
GREEN / YELLOW	GROUND	25	8
BLUE	NEUTRAL	25	8
BROWN	LINE	25	8

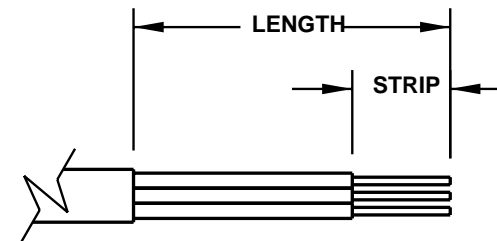

CORDAGE PREPARATION

