

CAT. No.
57091

IEC 320 C-19 CONNECTOR, DOWNANGLE CORD GRIP, BLACK RUBBER, 2 POLE 3 WIRE, 16 AMP 250 VOLT
STANDARD: IEC320 C-19

APPROVALS / CERT'S.


VDE

ALL DIMENSIONS ARE IN MILLIMETERS

MAXIMUM JACKET O.D. ACCEPTED BY EXTERNAL STRAIN RELIEF = 11 DIA (0.433")
MAXIMUM JACKET O.D. ACCEPTED BY INTERNAL STRAIN RELIEF = 9 DIA (0.354")
MAXIMUM CONDUCTOR SIZE ACCEPTED BY TERMINALS = 2.5 (14 AWG)

CORDAGE PREPARATION

CONDUCTOR INSULATION COLOR	CONDUCTOR COLOR CODE	"LENGTH"	"STRIP"
GREEN / YELLOW	GROUND	45	6
BLUE	NUETRAL	40	6
BROWN	LINE	40	6

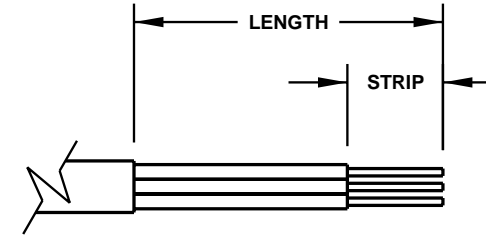

CORDAGE PREPARATION

