

CAT. No.  
**57110-K**

IEC 60320 C-20 PLUG, STRAIGHT CORD GRIP, BLACK, 2 POLE 3 WIRE, 16 AMPERE 250 VOLT

STANDARD: IEC60320 C-20


APPROVALS / CERT'S. VDE  ENEC

### ALL DIMENSIONS ARE IN MILLIMETERS



MAXIMUM JACKET O.D. ACCEPTED BY EXTERNAL STRAIN RELIEF = 9 DIA (0.354")  
MAXIMUM JACKET O.D. ACCEPTED BY INTERNAL STRAIN RELIEF = 10 DIA (0.394")  
MAXIMUM CONDUCTOR SIZE ACCEPTED BY TERMINALS = 2.5 (14 AWG)

#### CORDAGE PREPARATION

CONDUCTOR INSULATION COLOR	CONDUCTOR COLOR CODE	"LENGTH"	"STRIP"
GREEN / YELLOW	GROUND	40	8
BLUE	NEUTRAL	30	8
BROWN	LINE	30	8

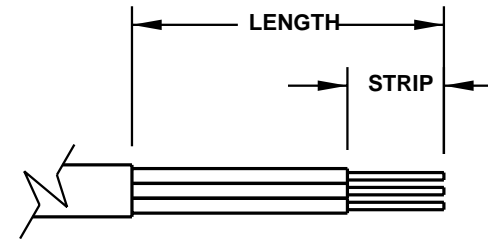

CORDAGE PREPARATION

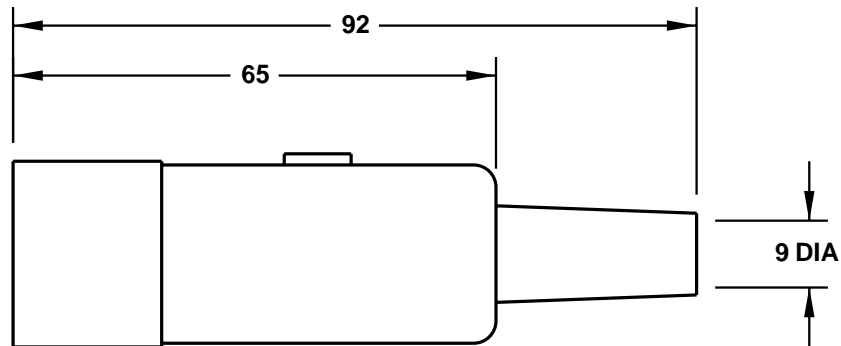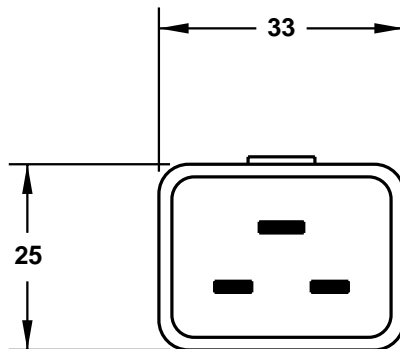

[www.InternationalConfig.com](http://www.InternationalConfig.com)  
[sales@internationalconfig.com](mailto:sales@internationalconfig.com)