

CAT. No.

61850

BRAZIL 6 OUTLET (BR2-10R & BR3-20R) POWER STRIP, 15A-250V, ILLUMINATED D.P. CIRCUIT BREAKER, 2.5 METER CORD W/ (BR3-20P) PLUG, 19" HORIZONTAL RACK MOUNTING, 2 POLE-3 WIRE GROUNDING, GREY STEEL HOUSING. CE MARK, NBR14136 STANDARD. TEMPERATURE RANGE +25°C TO -5°C.


CERTIFICATIONS

CE


STANDARDS

NBR 14136

ALL DIMENSIONS ARE IN MILLIMETERS

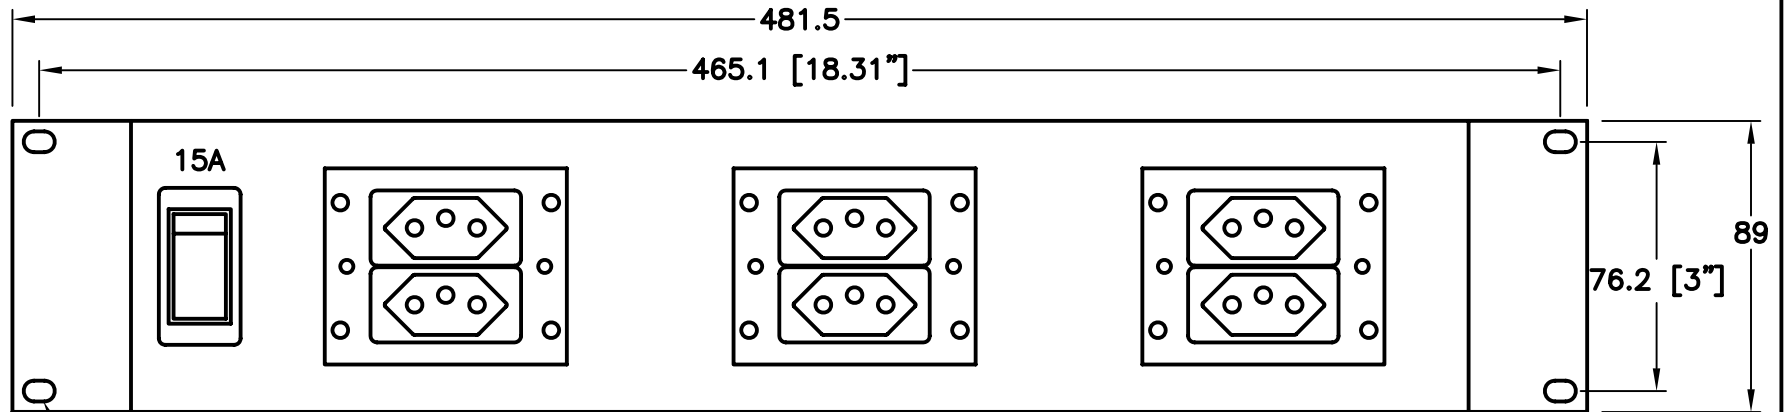

6.4x9.5 (0.25"x0.375") SLOT
TYPICAL (4) PLACES

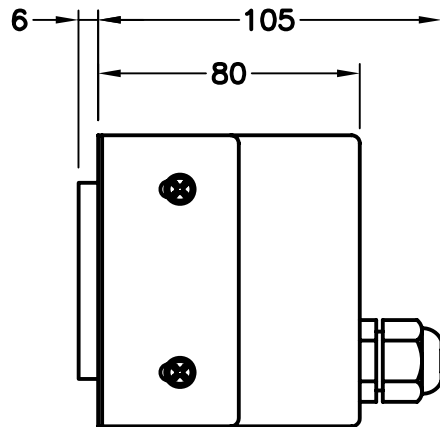

NOTE:

1. ALL 6 OUTLETS ARE (BR3-20R TYPE RATED 20A-250V) AND ACCEPT BOTH THE BR2-10P (10A-250V) OR BR3-20P (20A-250V) TYPE PLUGS AND CORD SETS.
2. RECOMMEND USING ONLY "STRAIGHT TYPE" MATING PLUGS AND CORDS SETS AS ANGLE TYPE PLUGS WILL BLOCK SOME OUTLETS.
3. USE 82100, 82140, 82150, 82160 FOR MATING CORD SETS, POWER CORDS.
4. USE 85330, 85430 FOR 20 AMPERE ANGLE PLUGS & 85340 FOR 10 AMPERE STRAIGHT PLUG.
5. USE 85360, 85460 FOR 10A & 20A RATED CONNECTOR BODIES.

BR3-20P