

CAT. No.

70140-RCD

EUROPEAN "SCHUKO" CEE 7/7 (EU1-16P) IP44 RATED RCD (GFCI) ANGLE PLUG. 16A-230V, 50HZ, (3680W), TEST/RESET BUTTON, 30mA TRIP LEVEL. BLACK. APPROVALS: TUV, CE MARK, ROHS CERTIFICATION. OPERATING TEMP.= -25°C, +40°C.

APPROVALS

TUV

CERTIFICATIONS

CE MARK  ROHS


ALL DIMENSIONS ARE IN MILLIMETERS

NOTE: THIS RCD (GFCI) REQUIRES "RESET" AFTER POWER FAILURE.  
NOT RECOMMENDED FOR USE ON FREEZERS, REFRIGERATORS, LIFE SUPPORT EQUIPMENT, ETC.

MAXIMUM JACKET O.D. ACCEPTED BY EXTERNAL STRAIN RELIEF = 8 DIA (0.315")  
MAXIMUM JACKET O.D. ACCEPTED BY INTERNAL STRAIN RELIEF = 9 DIA (0.354")  
MAXIMUM CONDUCTOR SIZE ACCEPTED BY TERMINALS = 2.5 (14 AWG)

**CORDAGE PREPARATION**

CONDUCTOR INSULATION COLOR	CONDUCTOR COLOR CODE	"LENGTH"	"STRIP"
GREEN/YELLOW	GROUND	22	8
BLUE	NEUTRAL	22	8
BROWN	LINE	22	8

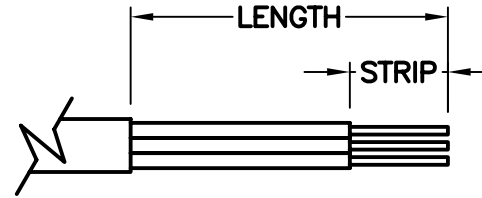

CORDAGE PREPARATION

NOTE:

- "SCHUKO" PLUGS AND RECEPTACLES ARE NON-POLARIZED.
- EQUIPMENT GROUND TERMINAL IS IDENTIFIED WITH  $\perp$  SYMBOL.

