

CAT. No.

70140

EUROPEAN "SCHUKO" CEE 7/7, DIN 49441 PLUG (EU1-16P), 2 POLE 3 WIRE, 16A-250V, WHITE, SPLASHPROOF IP44 RATED, THERMOPLASTIC BODY (HIGH IMPACT RESISTANT), TEMP. RANGE: -15°C to 45°C.

APPROVALS

CEBEC  FI  KEMA  OVE  SEMKO  UTE  VDE

ALL DIMENSIONS ARE IN MILLIMETERS

CERTIFICATIONS

ROHS

STANDARDS

CEE 7/7  DIN 49441


NOTE:

- "SCHUKO" PLUGS AND RECEPTACLES ARE NON-POLARIZED.
- EQUIPMENT GROUND TERMINAL IS IDENTIFIED WITH  $\perp$  SYMBOL.

MAXIMUM JACKET O.D. ACCEPTED BY EXTERNAL STRAIN RELIEF = 8 DIA (0.330")  
 MAXIMUM JACKET O.D. ACCEPTED BY INTERNAL STRAIN RELIEF = 9 DIA (0.354")  
 MAXIMUM CONDUCTOR SIZE ACCEPTED BY TERMINALS = 4.0 (12 AWG)

**CORDAGE PREPARATION**

CONDUCTOR INSULATION COLOR	CONDUCTOR COLOR CODE	"LENGTH"	"STRIP"
GREEN/YELLOW	GROUND	26	8
BLUE	NEUTRAL	26	8
BROWN	LINE	26	8

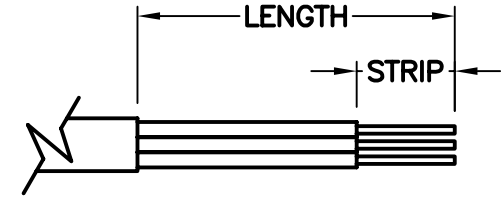

CORDAGE PREPARATION

