

CAT. No.
70142A

EUROPEAN "SCHUKO" CEE 7-7 STRAIGHT PLUG WITH 4.0 mm PINS, WHITE, 16 AMPERE 250 VOLT, 2 POLE 3 WIRE,
(EU1-16P)
STANDARD: CEE 7 - 7

APPROVALS / CERT'S. VDE

ALL DIMENSIONS ARE IN MILLIMETERS


NOTE:

1. "SCHUKO" PLUGS AND RECEPTACLES ARE NON-POLARIZED.
2. EQUIPMENT GROUND TERMINAL IS IDENTIFIED WITH  SYMBOL.


MAXIMUM JACKET O.D. ACCEPTED BY EXTERNAL STRAIN RELIEF = 10 DIA (0.394")
MAXIMUM JACKET O.D. ACCEPTED BY INTERNAL STRAIN RELIEF = 10 DIA (0.394")
MAXIMUM CONDUCTOR SIZE ACCEPTED BY TERMINALS = 2.5 (14 AWG)

CORDAGE PREPARATION


CONDUCTOR INSULATION COLOR	CONDUCTOR COLOR CODE	"LENGTH"	"STRIP"
GREEN / YELLOW	GROUND	10	5
BLUE	NEUTRAL	35	5
BROWN	LINE	35	5

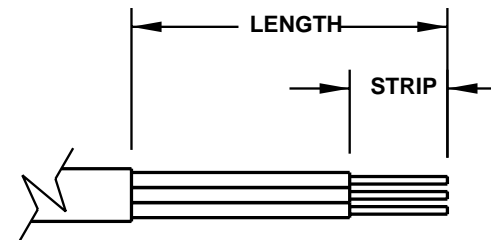

CORDAGE PREPARATION

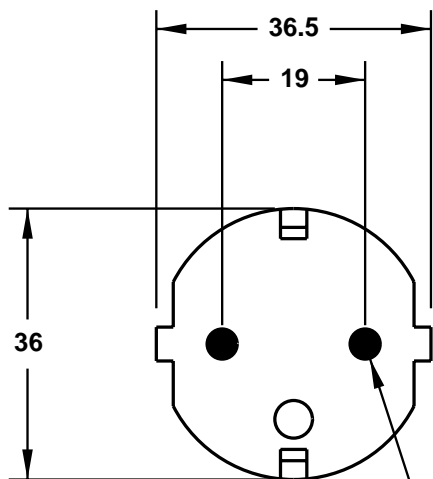

4.0 DIAMETER
TYPICAL

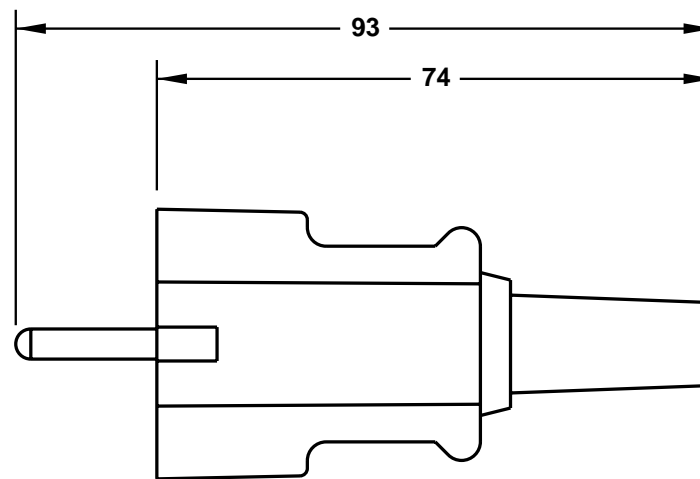

www.InternationalConfig.com
sales@internationalconfig.com